SIEMENS

Product data sheet

3RS1142-1GW80



TEMPERATURE MONITORING RELAY THERMOCOUPLE J,K,T,E,N,S,R,B, 2 THRESHOLDS, DIGITAL, -99 DEGREES C TO 1800 DEGREES C (SENSOR-DEPENDENT), 24 V TO 240 V AC/DC, 2 X 1 CO + 1 NO, WIDTH 45 MM, SCREW TERMINAL

General technical details:

General technical details:				
	AC/DC			
Hz	50			
Hz	60			
V	24			
V	240			
V	24			
V	240			
V	24			
V	240			
	Yes			
	Yes			
	1			
	0			
	1			
	2			
	Hz V V V V V			

• initial value	°C	-99
• final value	°C	1,800
Item designation / according to DIN EN 61346-2		К
Item designation / according to DIN 40719 extendable after IEC 204-2 / according to IEC 750		К
Ambient temperature		
during operating	°C	-25 +60

Mechanical design:

Design of the electrical connection		
 for auxiliary and control current circuit 		screw-type terminals
• jumper socket		Yes
Design of the sensor / connectable		type J, K, T, E, N (thermocouple)
Width	mm	45
Height	mm	106
Depth	mm	91

Certificates/approvals:						
General Product	t Approval	other				
	PG	Declaration of Conformity	Environmental Confirmations			

Further information:

ссс

Information- and Downloadcenter (Catalogs, Brochures,...) http://www.siemens.com/industrial-controls/catalogs

GOST

Industry Mall (Online ordering system)

http://www.siemens.com/industrial-controls/mall


Cax online generator:


http://www.siemens.com/cax

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

http://support.automation.siemens.com/WW/view/en/3RS1142-1GW80/all

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...) http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3RS1142-1GW80

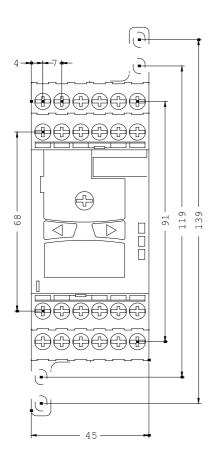

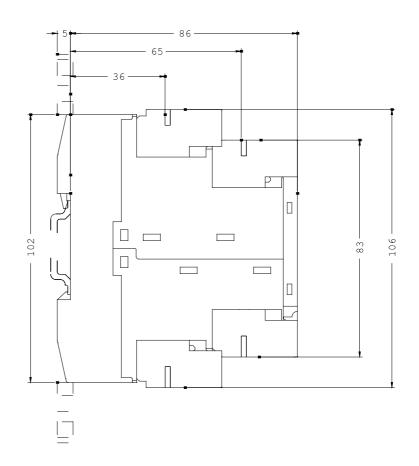

last change:

Feb 26, 2013